



ENVIRONMENTAL FOOTPRINT INSTITUTE

Environmental Footprint Declaration

Under the general rules of the Environmental Footprint Institute.

Environmental Footprint in accordance with ISO 14040, ISO 14044, ISO 14025 and EN 15804+A1 without program registration for:

Coil Coatings Paint by Beckers Industrial Coatings

Diffusion institution: Environmental Footprint Institute

Product group classification: UN CPC 3511

Registration number: 130820EFP

Issue date: 13-05-2019

Validity date: 12-05-2024

An Environmental Footprint Declaration (EFD) should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environmentalfootprintinstitute.org

Geographical scope: United Arab Emirates (UAE)



GENERAL INFORMATION

Product Provider



Beckers Industrial Coatings LLC

Al Khour Port, P. O. Box No.
12795, Ras Al-Khaimah United
Arab Emirates

Beckers Industrial Coatings LLC (Beckers) is a Swedish private coatings company that develops environmentally compatible paint systems. Beckers workforce comprises almost 1,800 people at 24 manufacturing sites, satellite offices and the corporate headquarters, serving customers in over 50 countries. The company is structured into three business segments: Coil Coatings, Industrial Coatings, and Consumer Design Finishes. This Environmental Product Declaration (EPD) refers to the Coil Coating product segment. Coil coatings are high-performance liquid paints applied to metal. As the leading supplier of coil coatings, the Beckers Group sets industry standards for high-performance liquid coatings applied to sheet metal.

Beckers Group has a coil coating paint production plant in Ras Al Khaimah, United Arab Emirates. The Quality and Environment Managers of Ras Al Khaimah Beckers' plant has commissioned the development of this EPD to report the environmental assessment of the coil coating paints manufactured in this plant.

Products

Beckers Coil Coatings products comprise **thermoset liquid paint** in a wide range of colours and finishes that can be applied to continuous steel or aluminium strip. They offer a complete range of topcoats, primers and backing coats.

Various types of products:

This EPD comprises the general environmental assessment of following Beckers products:



- BeckryPrim (Primer): can be used on steel or aluminium substrates for architectural or domestic appliances. The resin systems include epoxy, acrylic and polyurethane in addition to polyester series.
- BeckryCoat (Backing Coat): Epoxy, polyester and polyurethane backing coats are offered, for all situations. Formulations are available giving adhesion to insulation foams, anti-pressure marking, anti-coil collapsing and anti-fretting properties.

Topcoats:

- BeckryPol (Polyester): aminocured polyester-based coatings.
- BeckryTech (High Durable Polyester): architectural coatings based on unique polyester resins. Durability is second only to the fluoropolymers.
- BeckryFluor (PVDF): UV-resistant topcoat system based on a blend of polyvinylidene fluoride and acrylic resins in 70/30 – 80/20 ratios.
- BeckryTherm: thermal control of buildings to reduce the energy demand for heating and/or air conditioning. Utilizes high durability technologies based on BeckryTech or BeckryFluor.
- BeckryDuro: reinforced polyurethane chemistry having excellent UV durability and flexibility, combined with resistance to surface scratches.
- BeckryTan: highly durable polyurethane with excellent flexibility and UV stability.
- BeckryRoll: one-coat system (topcoat direct on substrate). One-coat finish, based on polyurethane chemistry modified with polyamide, for direct adhesion on aluminium substrate. Offers high abrasion resistance and good UV resistance.

Sustainable practices

Beckers operations are certified in accordance with industry standards to meet regulation. These are some of the sustainable practices throughout their manufacturing operations:

- In Beckers manufacturing plants evaporating solvents are incinerated to generate heat for curing ovens, this also prevents waste generation and pollution.
- In the case of plastisols, Beckers manufacturing method removed heavy metals such as cadmium and lead stabilisers before the 1990s and moved from phthalate plasticisers in the early 2000s. Beckers have now completed the reformulation of PVC Plastisols so that they fit in with customer specifications. The system is now totally free of chromates, heavy metals and phthalate plasticisers.
- Universal chromate-free primers combined with UV durable topcoats that do not require warning labels according to the GHS regulations contribute to site classification according to Seveso and help protect the environment.
- About use of bio-sourced materials in a coil coating environment, Beckers has launched the Ruv2 standard exterior durable topcoat, which is proving to do better than Ruv1 during exterior tests, and Ruv3 standard is on its way. Both have over 25% bio content in a standard white coating.



- The ECCA coil coating model predicts that high-solid coatings use less energy on a coil coating line.

Declared Unit

This EFD presents the environmental impacts of the production and distribution by Becker's plant in Ras Al Khaimah, UAE of 1 litre of coil coating paint.

The EFD only covers the Cradle to Gate stage plus transportation stage because other stages are very dependent on scenarios and are better developed for specific building or construction works.

Considering that the manufacturing processes are very similar regardless the type of product or if the product is a topcoat, a primer or a backing coat, the environmental impacts reported in this EFD correspond to the production and distribution of a **generic type paint** for coil coating. The number and amount of components of the generic type paint was calculated in the EFD using allocation rules based on the total amount of components supplied to the plant divided by the total production of each type of product manufactured and distributed between September 2017 and August 2018.

System boundaries.

A simplified model of the manufacture process of coil coating paint is described, enumerating the main activities included in the system boundaries.

In the boundaries of this EFD the end of the product life cycle is the gate of the plant that will do the coil coating process.

It is important to consider that this EFD refers to the paint manufacturing process, not the steel coil manufacture nor the coil coating process. For this reason, raw materials in Module A1 do not include the coils themselves, and process in module A4 do not include the coil coating processes.

The scope of this EFD is "cradle to gate with options".

Possible scopes of the LCA defined in EN 15804:2012+A1:2014


Product stage			Construction process stage		Use stage						End of life stage				Resource Recovery Stage	
Raw materials	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse Recovery Recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND

X = Included, ND=Module not declared, NR= Module not relevant

Modules from A5 to D are not declared (X refers to considered stage, NR refers to not relevant stage and ND to not declared stage).

Considering that the analysis has a "cradle to gate with options" scope (A1-A3 and A4) the Reference Product Life is nor relevant and has not been included.

In the following schemes, the modules are linked to the real phases of the manufacturing and distribution process.

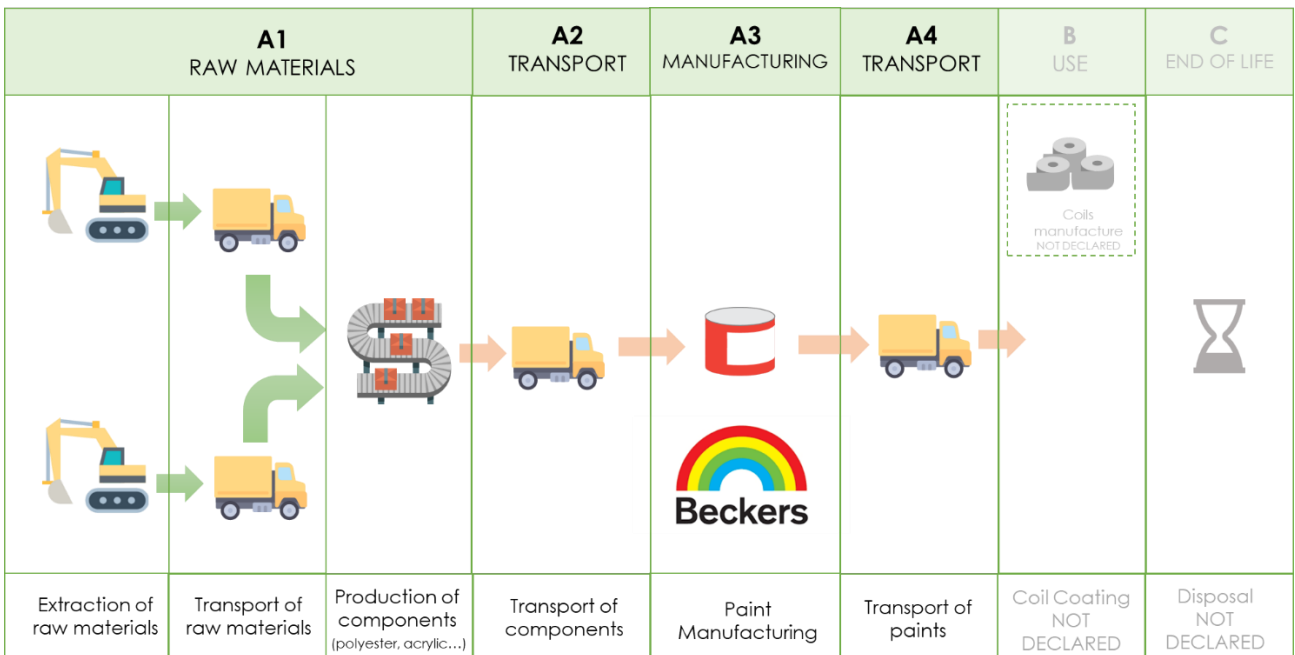


Product Stage

The raw materials such as resins (PVC), solvents, alcohols and other components are transported to the plant where coil coating paints are manufactured. The manufacture of the coils is out of the system boundaries.

Once the raw material and other components are manufactured, they are transported to the facilities of Beckers plant in Ras Al Khaimah, where the paint production is performed.

The following diagram is a more detailed description of the modules included.

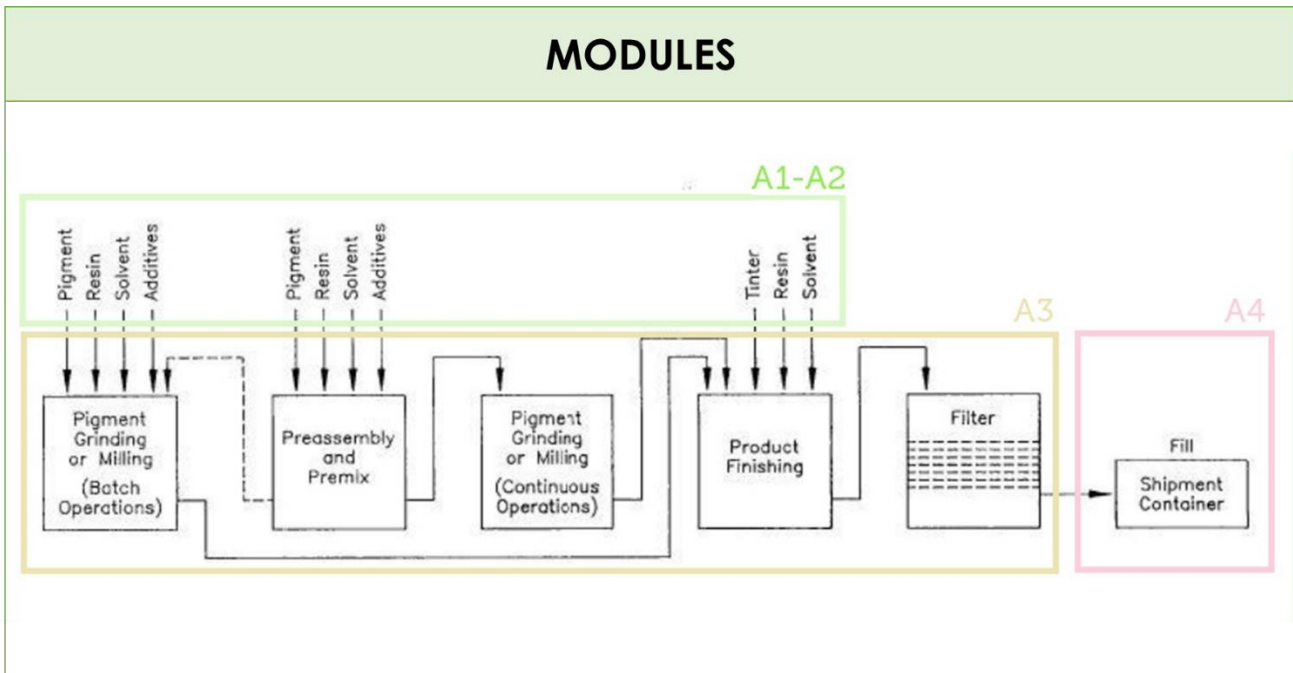

Here we include a brief description of the coil coating paint manufacture process (A3 module):

1. **Preassembly and Premix:** The first step in the manufacturing process is preassembly and premix. In this step, the liquid raw materials (e.g., resins, solvents, alcohols) are "assembled" and mixed in containers to form a viscous material to which pigments are added.
2. **Pigment Grinding:** The incorporation of the pigment into the paint to yield a fine particle dispersion is referred to as pigment grinding or milling. This process occurs in three stages (i.e., wetting, grinding, and dispersion) which may overlap in any grinding operation. Grinding is the mechanical breakup and separation of the pigment particle clusters into isolated primary particles. The goal of pigment grinding is to achieve fine, uniformly-ground, smooth, round pigment particles which are permanently separated from other pigment particles.
3. **Product Finishing:** Blending is the process of incorporating the additions into the material in order to meet the desired product specifications. In the case of batch operations, blending may simply consist of additional milling in a ball mill or added mixing and dispersing in a portable mix tank/high-speed disperser set-up.
4. **Filtering:** Filtering acts to screen out impurities (e.g., dust, gelled resin, and pigment aggregates) and to enhance the quality and uniformity of the product. The products are pumped through wound polypropylene or other resin cartridge filters. Bag filters, made from

felts (rayon, polypropylene, or nylon) or gauzes (polypropylene, nylon, or polyester), can be attached to the flanged end of a supply line.

- 5. Product filling/packaging:** Once the material has been filtered, it can be transferred into drums. Filling may be accomplished either manually or mechanically depending on the number and size of the containers to be filled.

Content declaration

The following list includes the main components and materials used in the manufacture of the thermo plastic liquid coil coating paints.

Material	Percentage
Resines	43%
Water	36%
Titanium	19%
Silica Aerosil/Acematt	<1%
Isocynates	<1%
Pigments	<1%
Solvents Organic	<1%

Substances listed in the “Candidate List of SVHC”

The following list includes all the substances used to manufacture the product that are included in the Candidate List of Substances of very high concern by European Chemicals Agency and their content exceeds 0,1% of the weight of the product.

Material Component	Substance	CAS number	Hazard Class and Category Code(s) ¹	Hazard statement Code(s) ¹
Paint	Strontium chromate	7789-06-2	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410

¹ REGULATION (EC) N° 1272/2008

Paint	Lead Chromate	7758-97-6	Carc. 1B Repr. 1A STOT RE 2 Aquatic Acute 1 Aquatic Chronic 1	H350 H360Df H373 H400 H410
-------	---------------	-----------	---	--

Technical Information

Electricity consumption

Electricity consumption is the only type of energy used in the paint production. A specific dataset with the emissions factors corresponding to the UAE electricity mix in 2018 has been developed. The emission factor for electricity consumption used is GWP 100a is 0,576 Kg CO_{2e}/KWh. The total emissions of CO_{2e} due to total electricity consumption are 70,73 gr CO_{2e}/litre of paint.

Transport to the use site Stage – A4

The coil coating paints are provided to customers in the UAE. To create a scenario of the A4 phase, all the paint sold from September 2017 to August 2018 has been analysed as representative of the international transport. The transport means are >32t trucks, as described in the following table.

Scenario	Parameter	Units	Value per functional unit
A2 – Cargo Ship	Vehicle type used for transport	Transoceanic cargo ship	n/a
	Vehicle load capacity	Kg (dw)	50.000.000
	Fuel type and consumption	Litres of heavy fuel oil per km	0,24
	Distance to construction site	Km	See detailed table
	Capacity utilization	%	See detailed table
	Bulk density of transported products	Kg/m3	n/a
	Volume capacity utilisation factor	n/a	1
A2 and A4 – Truck	Vehicle type used for transport	> 32t Truck	n/a
	Vehicle load capacity	Kg	29.960 kg
	Fuel type and consumption	Litres of diesel per km	0,38
	Distance to construction site	Km	See detailed table
	Capacity utilization	%	See detailed table
	Bulk density of transported products	Kg/m3	n/a
	Volume capacity utilisation factor	n/a	1

For every destination, the total amount of products delivered to customers have been taken to account according to the following detailed table:

Mean of transport	Destination ²	Distance	% of UF ³
A4-Truck	Al Quoz	129 km	2,4 %
	Al Ghail	5 km	76,5 %
	Dubai Investment Park	141 km	17,4 %
	Uma Al Quawain	151 km	1,2 %
	Hamriyah	79 km	2,0 %
	Sharjah	96 km	0,5 %

Calculation rules

Version 3,2 of software Air.e LCA™ with Ecoinvent™ 3.5 database have been used for LCA modelling and impacts calculations.

CML 2001 rev 4.7 has been used for impacts methods.

Annual Statistics 2017 report from Ras Al Khaimah Electricity and Water Authority has been used to create the model of Ras Al Khaimah electricity mix.

All processes in main facilities related to the product have been included in the assessment.

Minor components not directly related to the product, with less than 1% impact, such as office supplies, have been excluded from the assessment.

Only main means of transport have been included for materials purchases and delivery of coil coating paints. "Last mile" transport has been excluded. As far as final destinations of coil coating paints are not known in detail, transport distances have been calculated from factory to city purchaser. Operation in port has also been excluded.

Road distances calculated using Google Maps. Maritime distances calculated using MarineTraffic Voyage Planner.

When allocation rules where needed in the LCA a mass approach has been used. Cut-off rules: more than 99% of the materials and energy consumption have been included.

All transports of components have been included in the LCA considering real distances travelled by materials used from September 2017 to August 2018. Transport of raw materials needed to manufacture components are estimated in a global scale according to Ecoinvent™ criteria.

The Polluter Payer Principle and the Modularity Principle had been followed.

² Customer destination name hidden for confidential purposes


ENVIRONMENTAL PERFORMANCE

In the following tables, the environmental performance of the declared unit is presented for every sub-phase. The environmental impacts calculation follows the environmental footprint methodology.


Potential Environmental Impact

	A1-A3 Product stage	A4 Distribution	Total
Global Warming Potential (GWP100) (kg of CO ₂ equivalent)	2,17	4,48e-3	2,17
Ozone depletion (kg of CFC11 equivalent)	2,64e-7	8,82e-10	2,64e-7
Acidification of land and water (kg of SO ₂ equivalent)	1,73e-2	12,50e-6	1,73e-2
Eutrophication (kg of PO ₄ ³⁻ equivalent)	5,08e-3	2,59e-6	5,08e-3
Photochemical ozone creation (kg of C ₂ H ₄ equivalent)	1,10e-3	0,73e-6	1,10e-3
Depletion of abiotic resources (elements) (kg of Sb equivalent)	2.091,30	885,33e-3	2.092,18
Depletion of abiotic resources (fossil) MJ net calorific value	35,39	72,04e-3	35,39


Use of resources

	A1-A3 Product stage	A4 Distribution	Total
Use of RENEWABLE primary energy excluding renewable primary energy resources used as raw materials	2,05	7,54 e-3	2,05
Use of RENEWABLE primary energy resources used as raw materials	<0,01	<0,01	<0,01
Total use of RENEWABLE primary energy resources (primary energy and primary energy resources used as raw materials)	2,05	7,54 e-3	2,05


Data in MJ, net calorific value

	A1-A3 Product stage	A4 Distribution	Total
Use of NON- RENEWABLE primary energy excluding non- renewable primary energy resources used as raw materials	32,00	7,32 e-2	32,07
Use of NON-RENEWABLE primary energy resources used as raw materials	6,10	<0,01	6,10
Total use of NON-RENEWABLE primary energy resources (primary energy and primary energy resources used as raw materials)	38,10	7,32 e-2	38,17


Data in MJ, net calorific value

	A1-A3 Product stage	A4 Distribution	Total
Use of secondary material	<0,01	<0,01	<0,01

Data in kg


	A1-A3 Product stage	A4 Distribution	Total
Use of net fresh water	5,85	3,53 e-3	5,85

Data in m3

	A1-A3 Product stage	A4 Distribution	Total
Use of RENEWABLE secondary fuels	<0,01	<0,01	<0,01
Use of NON-RENEWABLE secondary fuels	<0,01	<0,01	<0,01


Data in MJ, net calorific value

Waste disposed

	A1-A3 Product stage	A4 Distribution	Total
Hazardous waste disposed	<0,01	<0,01	<0,01
Non-hazardous waste disposed	<0,01	<0,01	<0,01
Radioactive waste disposed			

Data in kg

Other output flows

	A1-A3 Product stage	A4 Distribution	Total
Components for re-use (Kg)	0	0	0

Materials for recycling (Kg)	0	0	0
Materials for energy recovery (MJ)	0	0	0
Exported energy (MJ)	0	0	0

DIFFERENCES VERSUS PREVIOUS VERSIONS OF THE EFD

This is the first version of the Environmental Footprint Declaration (EFD) so there is no previous version of this EFD.

DIFFUSION INSTITUTION AND VERIFICATION

Diffusion institution:	The Environmental Footprint Institute Calle CIRCE 49ª Madrid 28022 Spain www.environmentalfootprintinstitute.org
EFD registration number:	130820EFP
Published:	18-07-2019
Valid until:	12-05-2024
Product Category Rules:	UNE-EN 15804:2012 + A1:2014 Sustainability of construction works. Environmental Product Declarations. Core rules for the product category of construction products.
Product group classification:	UN CPC 3511
Reference year for data:	September 2017 – August 2018
Geographical scope:	United Arab Emirates (UAE)

Product category rules (PCR): UNE-EN 15804:2012

Independent verification of the declaration and data, according to ISO 14040 and ISO 14025:

Process Certification (internal) Verification (external)

Third party verifier:

Marcel Gómez Consultoría Ambiental

Name of the verifier: Marcel Gómez

info@marcelgomez.com

Approved by: The Environmental Footprint Institute

MANDATORY STATEMENTS

Explanatory material can be obtained from EFD owner and/or LCA author. Contact information can be found below.

The verifier and The Environmental Footprint Institute do not make any claim or present any responsibility about the legality of the product.

CONTACT INFORMATION

EFD owner:	<p>Santosh Jose Becker Industrial Coatings L.L.C. P.O. Box 12795 Al-Khour Port UAE-Ras Al Khaimah Phone: +971 72 27 88 53 E-mail: info-uae@beckers-group.com</p>
LCA author:	<p>S. Beskirajan, GCAS Quality Certifications P.O.Box 65561, Dubai, UAE www.gcasquality.com info.dubai@gcasquality.com</p> <p>Rubén Jiménez, Solid Forest S.L. CP 28703, San Sebastián de los Reyes, SPAIN www.solidforest.com info@solidforest.com</p> 



REFERENCES

This Environmental Footprint has been developed and diffused following the instructions of the Environmental Footprint Institute. Further information and the document itself with reference 130820EFP are available at: (www.environmentalfootprintinstitute.org)

LCA Report: Life Cycle Inventory of Coil Coating Paints.

Software: Air.e LCA rev. 3.4.12 (www.solidforest.com)

Main database: Ecoinvent 3.5 (www.ecoinvent.org)

Normatives: ISO 14040:2006 "Environmental management -- life cycle assessment -- principles and framework", ISO 14044:2006 "Environmental management -- life cycle assessment -- requirements and guidelines", ISO 14020 "Environmental Labelling: General Principles", ISO 14025:2006 "Environmental labels and declarations -- type III environmental declarations -- principles and procedures" and EN 15804